

BB1-63

PV Mini Circuit Breakers

Welcome to our website for more information:
www.zjbeny.com



BB1-63

PV Mini Circuit Breakers



- 1 Brand
- 2 Type
- 3 Rated Current
- 4 Rated Voltage
- 5 Ultimate Breaking Capacity
- 6 Certificate Symbol
- 7 Standard Code
- 8 Indicator
- 9 Wiring Diagram

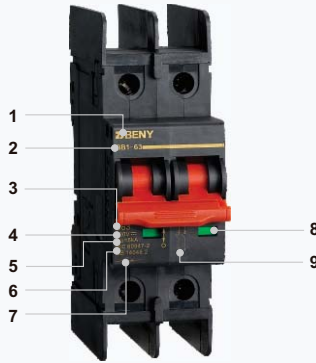
- Nonpolarity
- High Short-Circuit / Breaking Capacity
- Functions: Overload, Short Circuit, Unfrequent Operation and, Anti-reflux Protection
- Rated Voltage: 1200V, Ultimate
- Breaking Capacity : 4.5KA
- Rated Current: 63A
- Comply with : IEC60947-2/GB14048-2



Application

ZIBENY BB1 Series PV Mini Circuit Breakers are mainly applied to DC solar combiner box ,Controller etc. The main function include overload protection ,Anti-reflux protection and short-circuit protection. Scientific design of arc-extinguishing system keep solar system more safe. Max Voltage up to 1200V DC, current up to 63A.

Appearance Introduction







Type Instruction

BB1	-	63	4P	25	1200V
↓		↓	↓	↓	↓
Product Code		Max Rated Current	Pole	Rated Current	Rated Voltage
PV Mini Circuit Breakers		63A	1P 2P 3P 4P	3A,4A,6A 10A,13A,16A 20A,25A,32A 40A,50A,63A	300V 600V 900V 1200V

Parameter


Electrical Characteristics					
Type		BB1-63			
Comply with		IEC60947-2/GB14048.2			
Pole		1P	2P	3P	4P
Rated Working Voltage	Ue	300V DC	600V DC	900V DC	1200V DC
Max Rated Current		63A			
Rated Current	In	3A, 4A, 6A, 10A, 13A, 16A, 20A, 25A, 32A, 40A, 50A, 63A			
Rated Insulated Voltage	Ui	1200V DC			
Rated Impulsed Voltage	Uimp	4KV			
Ultimate Breaking Capacity	Icu	4.5KA			
Run Breaking Capacity	Ics	3KA			
Tripping Type		Thermal Magnetic Type			
Service Life/cycle Operation					
Mechanical	Actual Value	20000			
	Standard Value	8500			
Electrical	Actual Value	4000			
	Standard Value	1500			
Installation Environment					
Ingress Protection		All Sides IP40 ,Connection Terminal IP20			
Terminal Cross Section		2.5-25mm ²			
Working Temperature		-25°C ~ +70°C			
Storage Temperature		-40°C ~ +85°C			
Resistance to Humidity And Heat		II (when Humidity arrived to 55°C, Relative Humidity95%)			
Resistance to Shock		2.6 IEC60068			
Resistance to Impack		2.27 IEC60068			

Wiring Method


Pole	1P	2P	3P	4P
Type				
Contacts Wiring graph				

Characteristic Curve

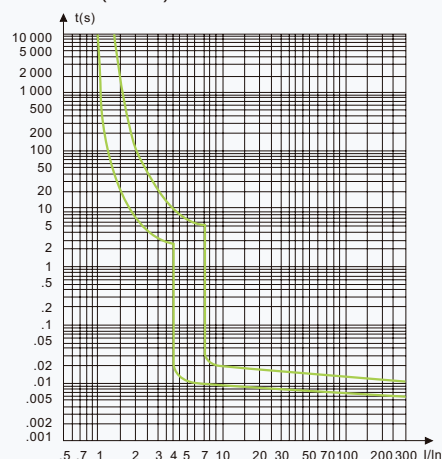B curve : (4.4-6.6) In



Dimensions(mm)

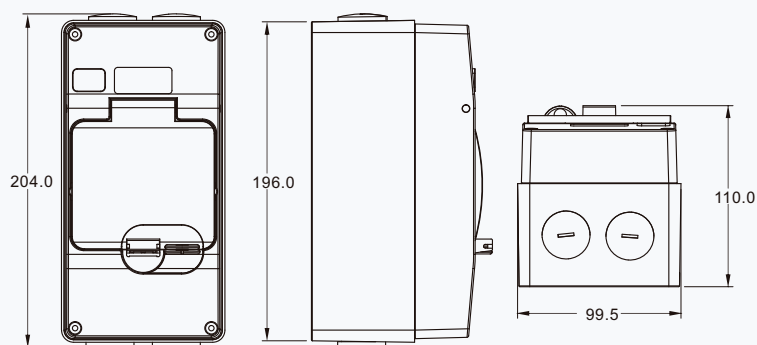

Dimensions(mm)

